

Characteristics of Urban Heat Island in Enugu During Rainy Season

Dr. Enete¹

¹ Nnamdi Azikiwe University, Awka.

Received: 6 June 2012 Accepted: 4 July 2012 Published: 15 July 2012

Abstract

The rainy season UHI characteristics at several sites in Enugu urban were evaluated using paired measurement programme. The aim was to determine the characteristic of urban heat island in the city during rainy season periods. Study Design: Survey Study. Place and Duration of Study: Enugu urban between months of June -July of 2006 and 2007. Methodology. Results : The results indicate that UHI at day and night during rainy season were very different. A downtown -centered heat island was observed both day and night. The day time variations were strongly correlated to the amount of tree shading while in the night, city climate was highly correlated to sky-view factors and thermal properties in the city. Maximum UHI was about 3.20c during the day and hour-to-hour difference was observed at night around (1800hrs to 2300hrs). Conclusion: UHI over Enugu have been analyzed and results reveal some spatial and temporal characteristics. The UHI has been found to occur throughout the day and night during rainy season. Its structure was observed to be greatly influenced by weather, city, metabolism, anthropogenic activities and local geographic features, land-use, land-cover as well as vegetation and population.

Index terms— Urban heat island, rainy season, paired measurement programme, temperature, urban, rural.

1 Introduction

One particularly important environmental characteristics of cities is the "Urban heat Island" where by Urban areas are hotter than their surrounding county site. This is a real problem, which will be made even worse by climate change (Roland, 2010). It has therefore become a prime focus of research. An urban heat Island is the name given to describe the characteristic warmth of both the atmosphere and surfaces in cities (Urban areas) compared to their rural surroundings. The heat Island is an example of unintentional climate modification when Urbanization changes the characteristic of the Earth's surface and atmosphere.

These urban heat Island may be up to 10-150c under optimizing conditions. With increasing urban development, heat Islands may increase in frequency and magnitude. These heat Islands have impacts that range from local to global scales and highlight the importance of Urbanization to environmental change.

The Scientific awareness of urban climate anomaly arose at least in the mid-eighteenth century. However, experimental studies had not been carried out until the development of meteorological instruments such as the thermometer in the mid-nineteenth century (Oke, 1991). It was especially from the mid-twenty Century that Urban heat Islands was observed practically in most part of the world except in extreme cold climates (Emmanuel, 2005).

Heat Islands develop when a large fraction of the natural land cover in an area is replaced by built surfaces that trap incoming solar radiation during the day then re-radiate it at night (Oke, 1982; Quattrochi et al, 2000). This shows the cooling process thereby keeping nighttime air temperature high relative to temperatures in less urbanized areas (Oke, 1982). Heat Island of varying extent and magnitude as been observed in most urbanized

areas in the world (Lansberg, 1981). As before, it is evident that urban heat island would cause various serious environmental problems in the tropics, but the urban climate of tropical cities has not been intensively studied (Oke, 1982). This study is not different for Enugu Urban. This study, therefore investigates the spatial characteristics of urban heat Island in the city of Enugu during rainy season.

2 Conceptual Framework

Modification of the earth's surface through urbanization can have a dramatic impact on local climates. And one of them is a phenomenon known as the urban Heat Island (UHI). Cities are typically about 40c hotter than the surrounding countryside and the larger they are, the bigger the difference. In a city, although heating, air-conditioning and transport, all produce energy, this is surprisingly small component of their heat balance -only about 50W m² (Roland, 2010). The difference between temperatures in a city and the surrounding countryside is therefore mostly due to what happens to the sun's energy in the two environments.

The amount of energy stored is a function of the mass and heat capacity of the layer and the rate at which energy is lost and absorbed. The ambient temperature within will be a function of the amount of energy stored there, the nature of the surface, its albedo, water heat capacity and thermal conductivity.

3 II.

1987). In rural areas, vegetation reflects about a quarter of the incoming short-wave radiation (visible light or short-wavelengths). Of the three-quarters that is absorbed, much of the energy is used to evaporate water from leaves a process known as "evapotranspiration". This cools the vegetation, which therefore radiates little long-wave radiation (infrared) and even less energy remains to heat the air by convection and to heat the soil by conduction.

In cities, where vegetation has largely been replaced by buildings and roads, the energy balance is dramatically altered. Dark, artificial materials reflect less and absorb more radiation than vegetation. This lower "albedo" means that only about 10% of the sun's radiation is reflected down into urban 'canyons' (Oke, 1982). Almost all of this energy goes into heating the dry roads and roofs, where it is either stored in bricks and mortar or heats the air above, thus raising daytime surface and air temperature well above those of the surrounding countryside. However, this "average" effect is complicated by the presence of parks, forested areas, rivers and streams and other non-urban features that exist in the landscape. This, detailed spatial investigation of the UHI can reveal micro-climatic details that explain how various surface features enhance UHI effect.

At night the difference in temperature between the countryside and the urban can become even more pronounced. Cities cool down more slowly because there is more heat stored in its buildings, which continues to dissipate into the night; (Quattrochi et al 2000); there is more pollution to trap long-wave radiation; and within urban canyons less of the cool sky is visible, so less radiation can escape.

All this causes major problems for city-dwellers. The rise in urban air temperature above that of the surrounding countryside, which can reach 70c in metropolis, makes cities less comfortable and less sustainable places to live in during rainy season months. Soaring temperature increase ill health and can even kill people during heat waves.

In an urbanized environment, the significant modifies of natural cycle of heating and cooling: manmade structures (buildings, paved surfaces); anthropogenic heat sources: industrial processes, internal combustion engines. The heat from these sources cumulates to give rise to pockets of high temperatures in urban centers that we call urban heat Island (UHI). Thus areas with high infrastructural development, industrial concentration and high density buildings and large population are expected to always encourage urban heat Island (UHI). The study area falls within the humid tropical rain forest belt of Southeastern Nigeria. It has two seasons, the raining season and the dry season. The rainy season which is characterized by heavy thunderstorms lasts from April to October with the South Westerly moisture accompanied by air mass moving northwards into the city. The turbulent runoff result in leaching, sheet erosion and eventually gullies (Akabuike, 1990). The mean temperature varies from about 20.30°C to about 32.16°C in the dry season and rainy season respectively, (Akabuike, 1990). During the dry season the humidity is lower than in the rainy season. Temperature is most often high during the day and low during the night. This results in high evaporation rate during the day. Harmattan which occurs between the months of November and February is always accompanied by poor visibility mostly at night and early in the morning. The rivers and streams which flow from the Udi hills dissect the study area into several sections. Thus there are rivers such as Ekulu, Idaw, Asata and Nyaba Rivers which separates Enugu South from Nkanu East. These rivers have many tributaries; the study area

4 Study Area

5 Global Journal of Human Social Science

Volume XII Issue X Version I

6 Methodology

Data collection spanned over two seasons (2006 to 2007). The essence was to capture the peak periods, frequency, magnitude and seasonality of urban heat variations in places. The months of June-July were selected because of high rainfall during this period. Temperature data were collected during the day and night. The following land use/land cover sites were selected for data collection. a. High-density, high-rise, non-residential areas with no greenery (DTL). b. High density, high-rise, residential areas with low greenery (HDR).

c. Medium density, mixed residential (some residential, some commercial/ institutional area with a greenery extent between DTL and HDR). d. Areas with similar land-use, building density and greenery one having more fully developed vegetation canopy than the other (LVR and LOR). During the study period, transect and fixed point measurements were taken hourly and averaged over a month. All temperature differences were calculated as site temperatures minus reference temperature. Thus a negative (-) temperature difference indicates that the site was cooler than the reference station; and positive (+) indicated the site was warmer than the reference station. The reference station is the rural environment.

7 Results

8 a) Rainy Season(Day-Time)

Table 1 shows temperature variations during stable atmospheric conditions during the day. The downtown location site was the warmest (+0.64) warmer than the residential sites. Places like Ogui road, Asata, Ogbete, Okpara Avenue and parts of Zik Avenue were warmer than neighboring sites. The high density, urban residential sites (HDR)-Achara Layout, and heavily vegetated urban sites (LVR)-(GRA, with fully developed vegetation canopy were the coolest (-2.31 and -3.3) respectively. The low-density residential sites (LOR) like independence layout, was only -0.22°C cooler than the reference site. Except for sites (NW2) where institutions and residential quarters are housed, hour-to-hour variation in air temperature during the daytime was not much. The NW2 sites witnessed higher temperatures during the day than in the night.

The number of sites that witnessed unstable conditions on multiple days was very few (sites DTL, LVR and NW2); the patterns were very similar to those produced by stable conditions. The average air temperature differences during unstable day-time are shown in table 2. Under unstable conditions too, downtown location sites (DTL) were the warmest. Maximum day time UHI was about 3.2°C and hour-to-hour difference was about 3.5°C. Unlike stable conditions, differences between LVR and NW2 under unstable conditions were 0.45°C warmer than the reference site. V. All residential sites were cooler than the reference site (from -0.34°C to 0.34°C) while the downtown location was up to 1.48°C warmer. The intraurban differences among the other sites (LOR, LVR, NW2 and HDR) however, were very small.

9 Discussion

Rainy season heat Island at the city wide scale correlated well with ground cover characteristics. Green cover alone explained about 40% of micro-climate variations. The influences of buildings and vegetative maturity were apparent. The magnitude of the temperature differences decreased as background climate became hotter. But hotter conditions led to higher intra-urban thermal comfort difference than the cooler nights. This finding highlights the need to distinguish between temperature Islands and thermal comfort Islands. The former peaks at clear calm nights while the latter reaches its maximum under overcast or hazy conditions.

Under very hot conditions, the low ground cover at the more open residential sites did not significantly improve day-time cooling. This suggests that shading was more central to daytime cooling than ground cover. Extensive tree canopy produced some cooling during the day, but the cooling provided by building shade at the high-density sites (like Achara Layout) had the same effect.

The highest nighttime intra-urban air temperature difference was observed early night period (1800 hrs. to 2300hrs). Unlike day-time, the hour-to-hour variation in air temperature during the night was very significant, particularly at the residential sites. Observations showed that there was a clear downtown centre heat Island at night. A maximum nighttime air temperature of about 2.0°C heat Island was observed during the study period.

10 VII.

11 Conclusion

Air temperature measurements over Enugu have been analyzed and results reveal some spatial and temporal characteristics of the UHI in Enugu. The urban heat Island has been found to occur throughout the day and night with the highest intensity occurring around 1800hrs and 2300hrs, with mean values reaching 3.2°C and 3.5°C during the day and night respectively. Its structure was also observed to be greatly influenced by weather, city metabolism, anthropogenic activities, local geographic features, land-use and land-cover as well as vegetation, and population.



Figure 1:

152 Finally, further study is needed to examine the possible mitigation measures for the effects of urban heat Island
153 in Enugu, focusing especially on the temperature reduction effects caused by the green areas. ^{1 2}

¹© 2012 Global Journals Inc. (US)

²© 2012 Global Journals Inc. (US) Year

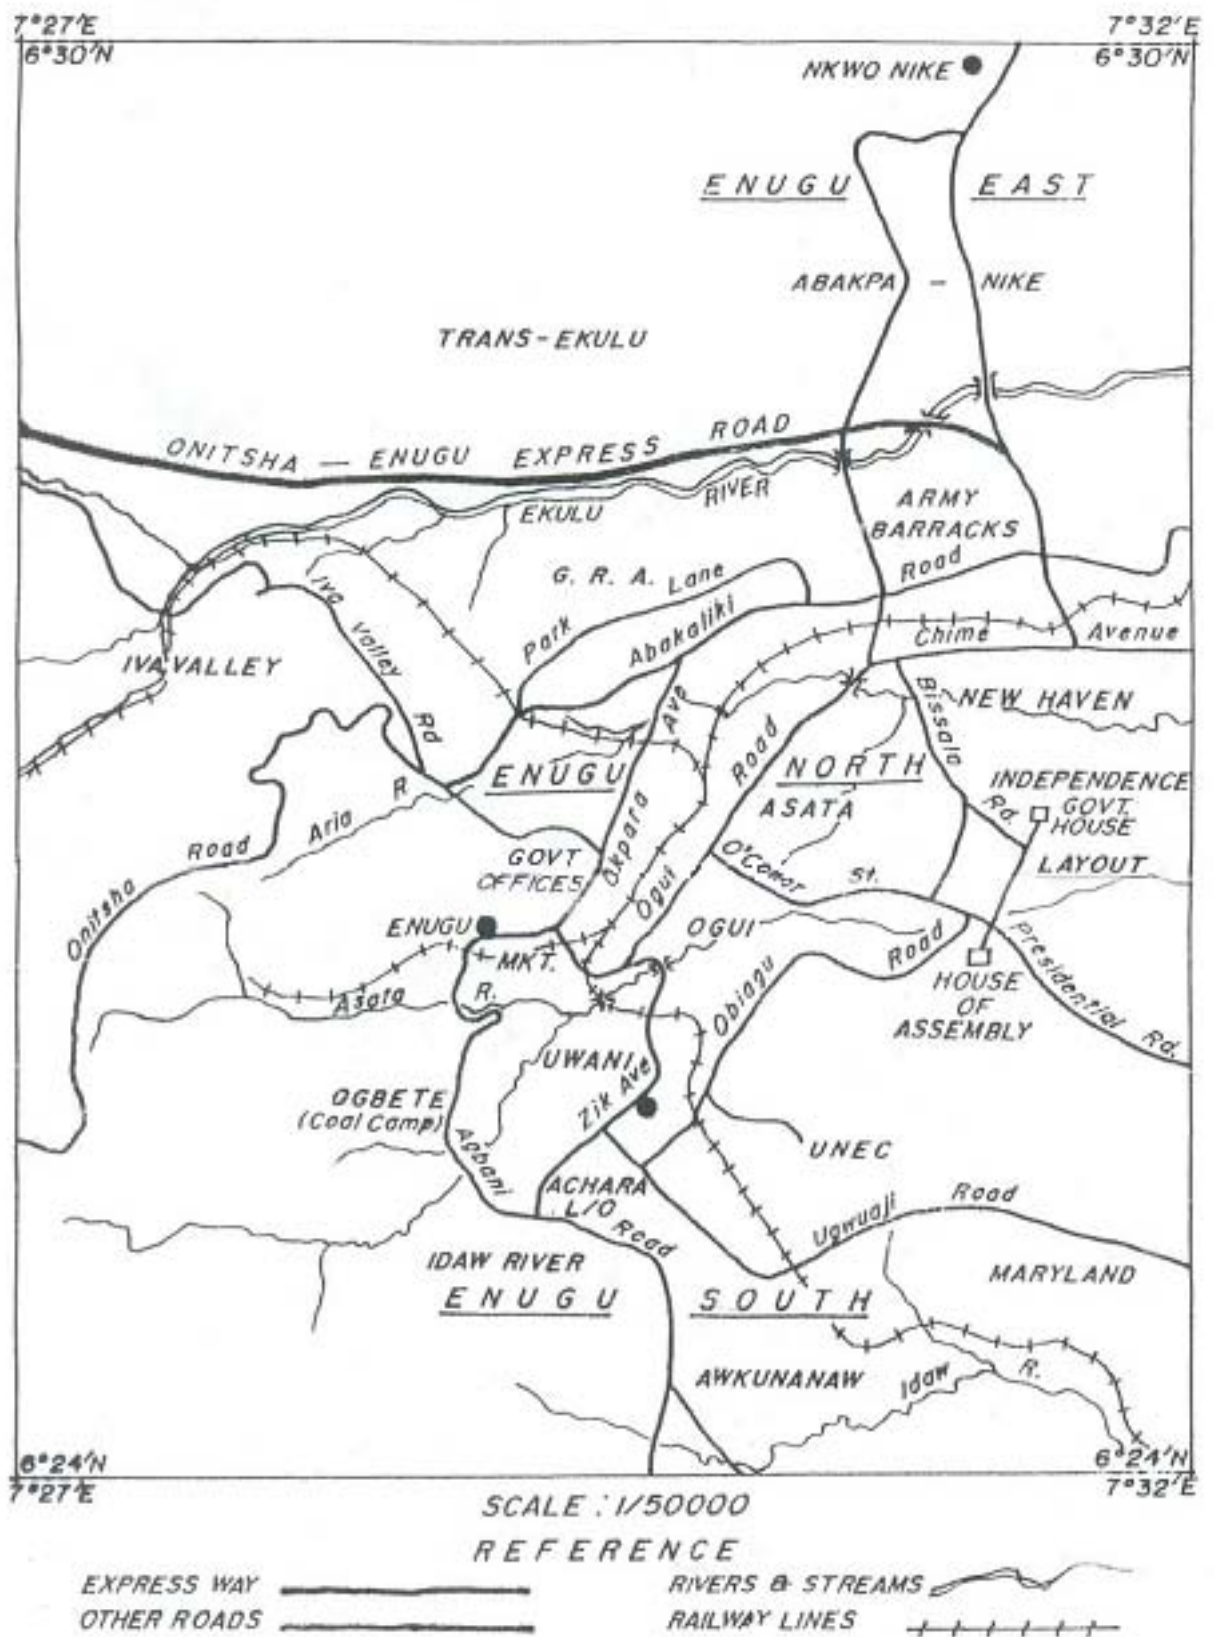


Figure 2: Figure 1 . 2 :

Figure 3:

1

Sites	Location Names	Temperature Difference
DTL	Ogui Road	+ 0.64
LOR	Independence L/O	-0.22
LVR	GRA	-3.3
NW2	UNEC	-2.0
HDR	Achara L/O	-2.1

Figure 4: Table 1 :

2

Sites	Location Names	Temperature Difference
DTL	Ogui Road	+ 1.52
LVR	GRA	-3.45
NW2	UNEC	-3.0

Figure 5: Table 2 :

3

Sites	Location Names	Temperature Difference
DTL	Ogui Road	+ 1.48
LOR	Independence L/O	-0.64
LVR	GRA	-0.34
NW2	UNEC	-0.39
HDR	Achara L/O	-0.52

Figure 6: Table 3 :

154 [Quattrochi et al. ()] 'A decision support information for urban landscape management using thermal infrared
155 data'. D Quattrochi , J Luvall , D Rickman , M Estes , C Laymon , B (Howell . *Photogrammetric Engineering*
156 *and Remote Sensing* 2000. 66 (10) p. .

157 [Akabuike ()] *A Short Text on Geography. Pegant Ventures*, B Akabuike . 1990. Enugu.

158 [Emmanuel ()] *An urban Approach to climate Sensitive Design*, M R Emmanuel . 2005. Spon Press.

159 [Oke ()] 'Climate of city'. T Oke . *Climate in human perspective, A tribute to Helmut, E Landsberg*, F Baer (ed.)
160 (Dordrecht, Netherlands) 1991. Kluwer Academic Publishers. p. .

161 [Oke ()] T Oke . *Boundary layer climates*, (London) 1987. Methuen and Co. p. 435. (nd edition)

162 [Oke ()] 'The Energetic basis of urban heat Island'. T Oke . *Quarterly Journal of the Royal Meteorological Society*
163 1982. 108 (455) p. .

164 [Landsberg ()] *The Urban Climate*, H E Landsberg . 1981. New York: National Academy Press. p. 275.

165 [Roland (2010)] *Urban Cool. Physicsworld*, E Roland . [http://physicsworld.com/cws/article/print/](http://physicsworld.com/cws/article/print/2010/aug/02/urba)
166 [2010/aug/02/urba](http://physicsworld.com/cws/article/print/2010/aug/02/urba) 2010. 2nd June, 2012.